

BOP-2020

Master Control Break-out Panel



The BOP-2020 Master Control Breakout Panel provides a convenient termination point for all of the digital audio signals, GPI/O, and alarm connections for an MC-2020 Master Control Switcher channel.

The panel is designed to be mounted in the rear of the rack containing the master control processor chassis and is provided with a kit of 3-foot cables to connect to the high-density D-connectors on the processor's rear panel.

The BOP-2020 supports both balanced and unbalanced cabling for the digital audio I/O connections with connectors provided for the full complement of four AES/EBU digital audio levels supported by the MC-2020 processor.


BOP-2020 FEATURES

- FULL BREAKOUT OF AUDIO, GPI/O, AND ALARM CONNECTIONS
- RECESSED MOUNTING FRAME WITH HINGED, REMOVABLE COVER
- BREAKOUT TO EITHER BALANCED OR UNBALANCED AUDIO CONNECTIONS



In addition to the basic audio I/O connections, the BOP-2020 provides termination points for the processor's audio reference and timecode inputs, alarm contacts, and GPI/O contacts. These connections are provided on two-part terminal strips for easy connection to external devices.

The BOP-2020 is housed in a 2RU recess-mount frame to allow it to be easily mounted in the rear of the rack with a convenient space for dressing the cables. A hinged, removable acrylic cover protects the connections while allowing easy access for installation and maintenance.

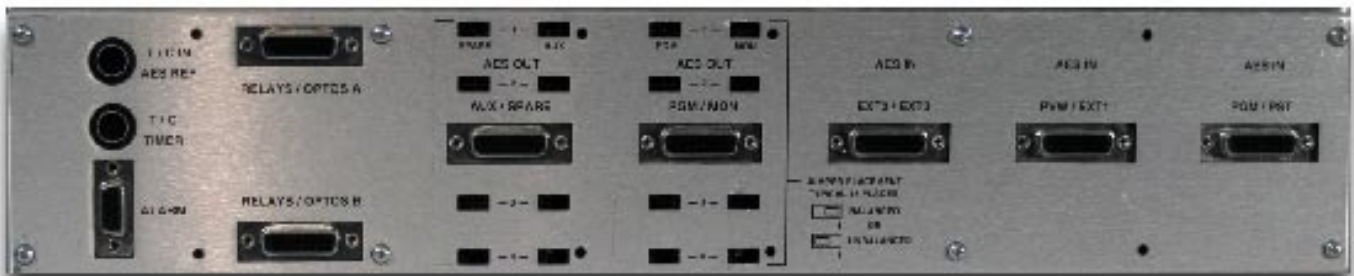

FOR FURTHER INFORMATION
 on the individual products in the Master Control family, please refer to the detailed data sheets that are available on our Web Site:
www.utahscientific.com



www.utahscientific.com
 E-mail: sales@utsci.com



4750 Wiley Post Way -- Suite 150
 Salt Lake City, Utah 84116
 Phone: +1 (801) 575-8801
 Fax: +1 (801) 537-3099

Via Filli Bandiera, 52
 20050 Verano Brianza (MI)
 Italy
 Phone: +39 0362 330 001

Thoroyaveien 11
 3209 Sandefjord
 Norway
 Phone: +47 33 522 700